

Peregrine Road Redevelopment Project

October 2012

AST LTD

Access Control/ Door Entry System / Doors

End User: A2 Dominion Group

Main Contractor: MITIE

Project Name: Peregrine Road (A2 Dominion Redevelopment)
Supply and Commission the Door Entry System, Access Control & Aluminium Doors (Front & Rear) on 5x Blocks as per A2Dominion specification.

Date of Installation: October 2012

Works on each Block consisted of:

New Aluminium Doors incorporating :

- Concealed Transom Closer
- Anti-Finger trap stile
- Mid-Rail
- Low profile drained threshold
- Pad handles

1 x Front Communal Entrance Door – Installation of a Single Portcullis Door with Portcullis side screens to either side secured with double Mag locks.

1 x Rear Entrance Door – Installation of a Single Portcullis Door with Portcullis side screens to either side secured with double Mag locks.



Added Security Technology (London) Ltd
Unit 1, Ebury Business Centre, 161-163 Staines
Road, Hounslow, TW3 3JZ

Tel: 0208 568 6130 - Fax: 0208 181 6427
sales@astlondon.co.uk - www.astlondon.co.uk
Company Reg.: 05762762 VAT Reg.: 881378980

Peregrine Road Redevelopment Project

October 2012

AST LTD

Access Control/ Door Entry System / Doors

New Door Entry System:

Front Communal Entrance Door – Installation of the following:

- A Functional Sentinel 4 Door Entry Panel with a built in AST PROX proximity reader
- Request to exit button for Exit
- Firemans Drop Key Switch.


Rear Entrance Door, will have AST PROX proximity reader and Request to exit button for Exit.

Each Flat (except 37-43) will be fitted with a Audio handset and connected to the Door Entry System.

- Handset has timed privacy button to disable ring tone (8h default)
- Isolation card to isolate faulty handsets from system; faulty handsets will not cause problems to the whole system as ISO card will isolate it.
- PSU unit with backup battery and BST/GMT self-correcting trades timer

Main Entrance Gate to Estate – Installation of a Digital Sentinel 4 Door Entry Panel with a built in AST PROX proximity reader and Request to exit button for Exit and Firemans Drop Key Switch. - Locking supplied 2 x S/Steel Mortice maglocks & 1 x heavy duty gate closer & 1 x Post for Exit button

3x Side Gates to Rear Block 1-11 – Installation of the AST PROX proximity reader and Request to exit button for Exit. - Locking supplied 2 x S/Steel Mortice maglocks & 1 x heavy duty gate closer & 1 x Post for Exit button

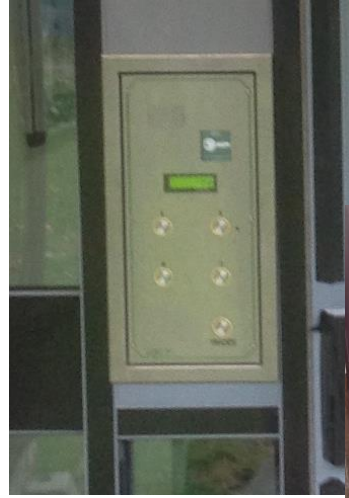

108 AST PROX Keyfobs included 3per Flat and 4 spare (34Blue, 34 Green, 34 Yellow & 6 Red)

There will be an equipment box located on every floor in Elec. riser that will serve relevant floor handsets.

